

### ► Product Features

- Miniature package for space saving
- Top actuated
- RoHS Compliant




### ► Materials

Part Name	Housing	Cover	Stem	Contact	Terminal
Material	Nylon	Nylon	Nylon	Stainless steel with silver plating	Phosphor bronze with silver plating

### ► Specification

Operating Force	40 gram max.
Operating Temperature Range	-15°C ~ 70°C
Typical Rating	100mA, 5VDC
Actuation Life Cycle	50,000 cycles
Insulation Resistance	100 MΩ min @ 250VDC
Dielectric Strength	250 VAC for 1 minute
Contact Resistance	500mΩ max.

### ► Part Number

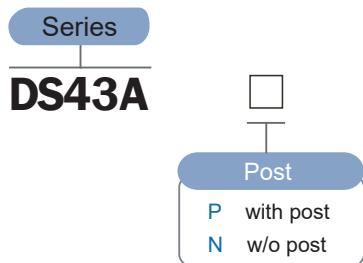

### ► Drawing

