

Specifications

Power Input: DC 5V $\pm$ 0.5V.

Type: 2 Axes, X / Y

Output: Analog DC 0~5V.

Operating Temperature: -20°C to 65°C.

Operating Life: X / Y Axes 2 million cycles min.

Ingress Protection:



Materials

Moving Parts: Thermoplastic.

Plastic Parts: Nylon.

Bottom Cover: ABS.

Shaft: Stainless Steel.


Seal: Silicone.

Copper Parts: Brass



Wire: Standard wire 28 AWG with A1251 (8 PIN) connector.

Application Diagram:






HOW TO ORDER

Note: Specifications and availability subject to change without notice.

MODEL NO.	OUTPUT	CASE	LASER MARKING	WIRE
HEJA				
	V1 0-5V	D02 D Logo (HEJA01)	00 No Marking (Std.) DC Date Code	501 150 mm wire leads (Std.)

EXAMPLE: HEJAV1-D0200-501 (Std.)

DIMENSION

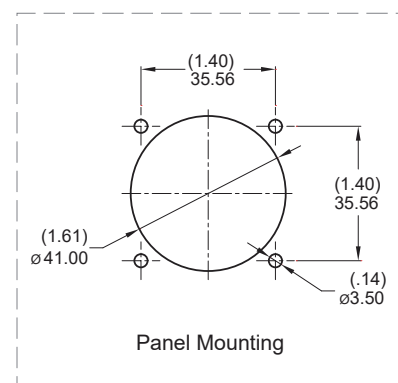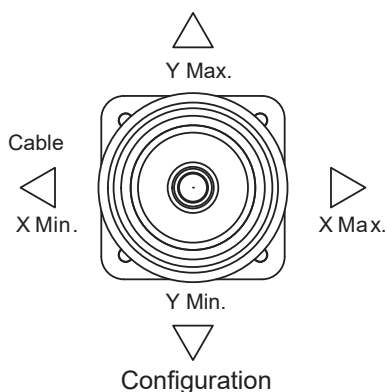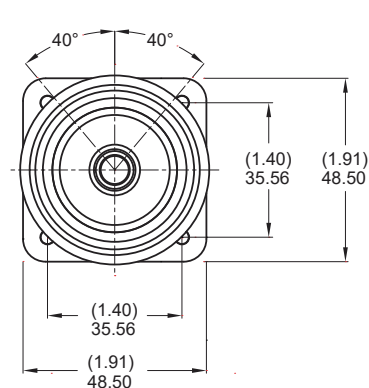

Model name. HEJAV1-D0200-501

