

## ► Product Features

- Dual pole, dual throw circuitry
- Push-to-latch or momentary actuation
- Silent clicking available
- Customized available
- RoHS Compliant




## ► Materials

Part Name	Base	Cover	Stem	Terminal	Spring	Contact
Material	PA66	PA66	PA66	Ag plated Brass	Stainless Steel	Ag Plated Phosphor Bronze

## ► Specification

Operating Force	250 gram
Actuator Travel	2.5 mm
Operating Temperature Range	-30°C ~ 85°C
Voltage Rating	10mA, 30VDC
Actuation Life Cycle	10,000
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

## ► Part Number

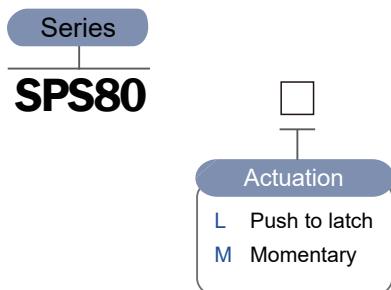

**SPS80**
